

InstaShow® WDC15

Driver-Free 4K UHD Wireless Presentation System

Designed for huddle and small meeting rooms, WDC15 enables instant plug-and-play wireless presentations—no apps, drivers, or network setup required. Presenters—even guests—can access professional-grade presentations with a tap.



No App Download Required

No software or app required—just plug in and instantly share content during your meeting.



No Driver Needed

No drivers needed—just plug in and share your screen instantly during meetings.

*Supports Windows, macOS, Linux, or ChromeOS systems.



No Network Setup Required

No complex network setup or IT help needed. Receiver and button pair automatically—just plug and play to start presenting instantly.

Dimensions & Connectivity

• Button




• Receiver



- 1. Present Key
- 2. USB-C Connector
- 3. Mode Key
- 4. Reset Button
- 5. Paring Key
- 6. Standby On/Off

- 7. USB for Touchback
- 8. RJ45
- 9. HDMI Out
- 10. Power Switch

3 Steps for One-Time Wireless Presentation Setup

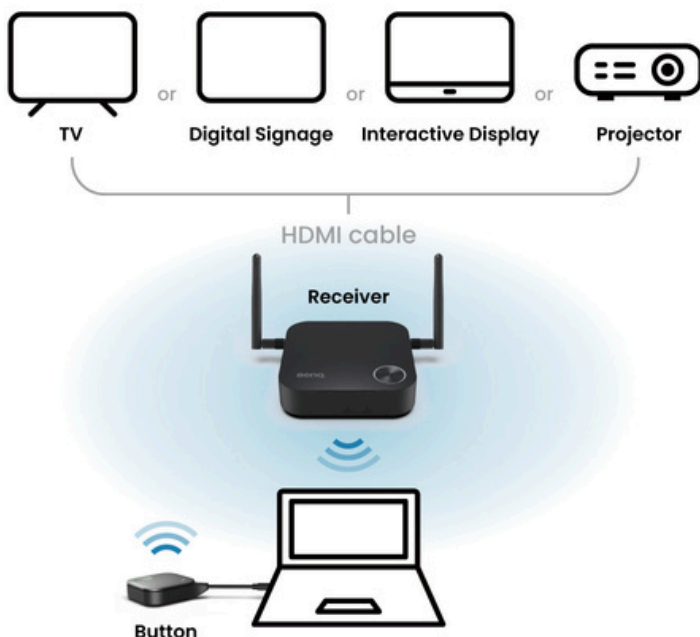

Set up once—no need to rebuild for every meeting.

Steps:

1. Connect display to Receiver via HDMI cable
2. Plug Button into presenter's laptop
3. Share content from presenter's laptop via Button

*Supports Windows, MacBook, or Chromebook systems.

Specifications

InstaShow Button

Connector Type	USB Type C
Function Key	Mode Key

InstaShow Receiver

Power Supply	2A, DC 5V±10%
Normal Power Consumption	10W
LAN (RJ45)	(x1)
HDMI Out	(x1)
Dimensions without Antenna	110x110x29 mm
Weight	205 g

InstaShow Cradle

Dimensions	84.5x62.5x128mm
Weight	568 g

InstaShow Package

Receiver	(x1)
Button	(x1)
Cradle	(x1)
Power Adapter	(x1)
Antenna	(x2), 2dbi, MIMO
HDMI Cable	(x1)
Safety Statement	(x1)

InstaShow Features

Video Outputs	HDMI 1.4 (with HDCP)
Maximum Output Resolution (Receiver)	Up to 4K 30Hz
WiFi Standard	5
Wireless Frequency	5G
Wireless Data Rate (Maximum)	AC1200 (5G 867 Mbps)
Simultaneous Connections	16
WiFi Protected Access	WPA3
Advanced Encryption Standard	AES128



Learn more



BenQ Singapore