

SPECIFICATIONS

Display	
Projection System	DLP Single 0.65" Full HD
DMD type	DC3 DMD chip
Native Resolution	1920 x 1080 pixels, 16:9
Brightness	4,000 Lumens
Contrast Ratio*	16,000:1
Display Color	1.07 Billion Colors
Aspect Ratio	Native 16:9 (5 aspect ratio selectable) _
Light Source	Lamp (240W_)
Light Source life*	4000/8000/8000/15000hrs _(Normal/Eco/SmartEco/Lampsave Mode)_
Optical	
Throw Ratio	1.15~1.5
Zoom Ratio	1.3X
Lens Control	Manual Zoom and Focus
Lens shift	N/A
Keystone Correction	2D keystone, Vertical ± 30 & Horizontal ± 20 degrees, Auto Vertical keystone
Projection Offset	105%±2.5% (Full-Height)
Projection Size	30"~300" _
Audio	
Built-in Speaker	10W x1
Special Feature	
Security	Kensington Lock, Security Bar
Feature	"2D Keystone, Auto Vertical keystone, Corner Fit, USB Reader, LAN Control, AMX/ P J Link/Creston/Extron IPL Compatible, MDA Compatibility LAN Display, Optional Wireless Display, Split Screen, Support Meeting/Class-room collaboration via QCast Software.(Conference Control)"
Compatibility	
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)
Horizontal Frequency	15~102KHz
Vertical Scan Rate	23 ~ 120 Hz
HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM_
Power	
Power Consumption(Max/Normal/Eco)	Max 355W. Normal 320W. Eco 240W.
Standby Power Consumption	Normal < 0.5Watts. Network < 2W.
Power Supply	100 ~ 240V AC
Dimension and Weight	
Product Dimensions (WxHxD)	11.7" x 4.7" x 8.7" (296 x 120 x 221 mm)
Product Weight	5.5lbs
Operation Condition	
Noise Level(Normal/Eco)	33/29 DbA
Operating Temperature	0 ~ 40°C
Accessories	
Accessories (Standard)	Power Cord (by region) Remote Control (RCE013) AAA Batteryx2 VGA cable Warranty Card (by region) QSG (4J.JGR01.001) User Manual CD (5B.JGR01.001) Lens Cover
Accessories (Optional)	Spare Lamp Kit (P/N: 5J.JGT05.001) 3D Glasses (5J.J9H25.002) Wireless Dongle: WDRT8192 USB Dongle(5J.J3F28.X01) Wireless Dongle: QCast Mirror (5A.JH328.10X) Wireless Dongle: QCast (5J.JCK28.X01) Ceiling mount
OSD	
On Screen Display Language	"Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/ Spanish/ Swedish/ Turkish/Thai/TraditionalChinese/Vietnamese /Farsi (30 Languages)

MH733


BenQ DLP Projector

KEY FEATURES

- 4000 ANSI Lumen High Brightness
- 16000:1 High Contrast Ratio
- Up to 15000 hrs long lamp life
- USB Reader Compatible
- Networking Connectively



INPUT / OUTPUT TERMINALS

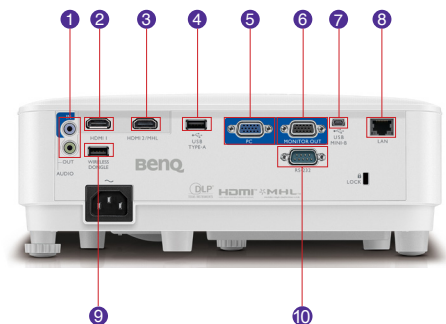

- | | |
|-----------------------------|-----------------------------|
| 1 Audio In/Out | 6 Monitor out (D-sub 15pin) |
| 2 HDMI I | 7 USB Mini-B |
| 3 HDMI 2 / MHL | 8 LAN |
| 4 USB Type-A | 9 Wireless Dongle |
| 5 Computer in (D-sub 15pin) | 10 RS232 (DB 9-pin) |

BenQ.us | BenQ.ca

BenQ is a registered trademark of BenQ Corp. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.



Because it matters