


BenQ Business Pantone® Validated Signage

SL4304 / SL5504 / SL6504 / SL7504 / SL8604

A Different Level Of Colour

The SL04 is the world's first signage to be Pantone® Validated, Pantone® SkinTone™ Validated, and Google EDLA certified, and features a vivid colour gamut and powerful signage content management.

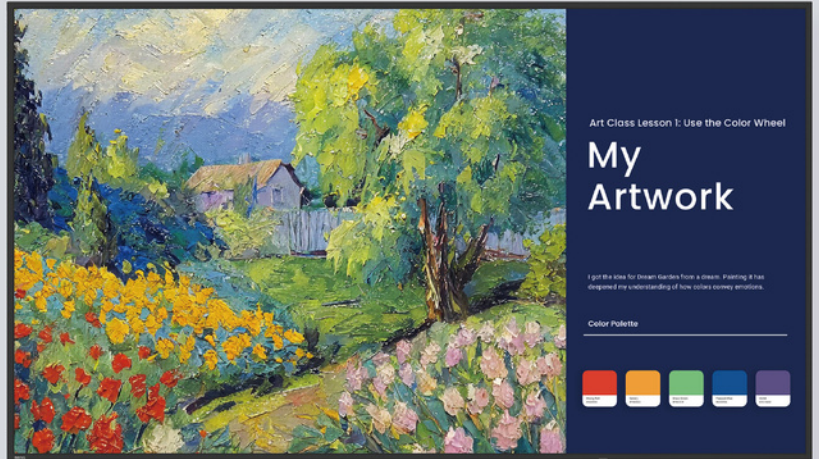

Pantone colours




Vibrant visuals



X-Sign

Remote content management



24/7 non-stop



DMS

Remote device management




InstaShare 2

Wireless casting



Google Core services

Vibrant Brightness With Clarity

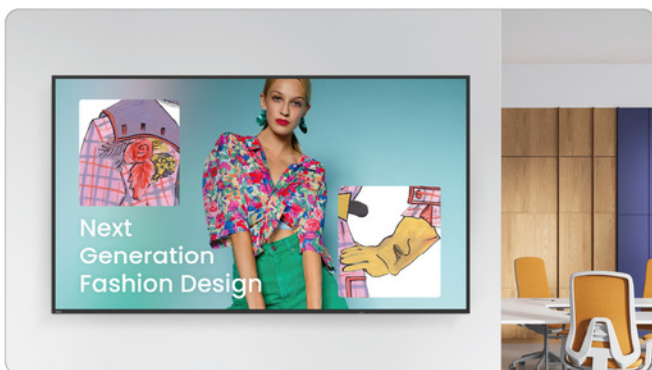

With 500 nits of brightness and 99% sRGB colour gamut, the SL04 delivers rich and vivid visuals, making it ideal for showcasing your content in lobbies, meeting rooms, break areas, and a variety of other public or corporate spaces.

Seamless Sharing Anywhere



With BenQ InstaShare 2, wirelessly mirror Windows devices, cast via session ID without network limits, and extend displays in portrait or across large rooms—ensuring effortless collaboration in any workspace.

BenQ

Specification

Model	SL4304	SL5504	SL6504	SL7504	SL8604
Panel					
Screen size	43"	55"	65"	75"	86"
Light source	Direct LED	Direct LED	Direct LED	Direct LED	Direct LED
Panel type	IPS	IPS	IPS	IPS	IPS
Operation hours	24 hours / 7 days	24 hours / 7 days	24 hours / 7 days	24 hours / 7 days	24 hours / 7 days
Orientation	Landscape and portrait	Landscape and portrait	Landscape and portrait	Landscape and portrait	Landscape and portrait
Panel dimensions	37.1 × 20.8 in (941.2 × 529.4 mm)	47.6 × 26.7 in (1209.6 × 680.4 mm)	56.2 × 31.6 in (1428.5 × 803.5 mm)	64.9 × 36.5 in (1649.7 × 927.9 mm)	74.6 × 42.0 in (1895.0 × 1066.0 mm)
Aspect ratio	16:9	16:9	16:9	16:9	16:9
Contrast ratio (typical)	1200:1	1200:1	1200:1	1200:1	1200:1
Resolution	4K UHD (3840 × 2160 pixels)	4K UHD (3840 × 2160 pixels)	4K UHD (3840 × 2160 pixels)	4K UHD (3840 × 2160 pixels)	4K UHD (3840 × 2160 pixels)
Response time	8 ms	8 ms	8 ms	8 ms	8 ms
Pixel pitch	0.009 × 0.009 in (0.25 × 0.25 mm)	0.012 × 0.012 in (0.32 × 0.32 mm)	0.014 × 0.014 in (0.37 × 0.37 mm)	0.016 × 0.016 in (0.43 × 0.43 mm)	0.019 × 0.019 in (0.49 × 0.49 mm)
Frame rate	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
Viewing angle	178°	178°	178°	178°	178°
Panel surface	Anti-glare Haze 25%	Anti-glare Haze 25%	Anti-glare Haze 25%	Anti-glare Haze 25%	Anti-glare Haze 25%
Colour gamut (CIE 1976)	99% sRGB, 72% NTSC	99% sRGB, 72% NTSC	99% sRGB, 72% NTSC	99% sRGB, 72% NTSC	99% sRGB, 72% NTSC
Colour depth	10-bit	10-bit	10-bit	10-bit	10-bit
Panel brightness (typical)	500 nits	500 nits	500 nits	500 nits	500 nits
Backlight life (typical)	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs
Glass					
Anti-glare	Yes	Yes	Yes	Yes	Yes
System					
CPU	A73 × 4 + A53 × 4	A73 × 4 + A53 × 4	A73 × 4 + A53 × 4	A73 × 4 + A53 × 4	A73 × 4 + A53 × 4
GPU	G52 MP8	G52 MP8	G52 MP8	G52 MP8	G52 MP8
Operating system	Android 13.0	Android 13.0	Android 13.0	Android 13.0	Android 13.0
Memory Storage	8 GB 64 GB	8 GB 64 GB	8 GB 64 GB	8 GB 64 GB	8 GB 64 GB
Connectivity					
HDMI (in out)	2 × HDMI 2.0 No	2 × HDMI 2.0 No	2 × HDMI 2.0 No	2 × HDMI 2.0 No	2 × HDMI 2.0 No
Ethernet	10 / 100 Mbps × 1	10 / 100 Mbps × 1	10 / 100 Mbps × 1	10 / 100 Mbps × 1	10 / 100 Mbps × 1
RS-232	1 0	1 0	1 0	1 0	1 0
USB-A	2 × 2.0	2 × 2.0	2 × 2.0	2 × 2.0	2 × 2.0
Built-in peripherals					
Speaker	2 × 12 W	2 × 12 W	2 × 12 W	2 × 12 W	2 × 12 W
IR sensor	Yes	Yes	Yes	Yes	Yes
Power					
Power	AC 100 – 240 V 50 / 60 Hz	AC 100 – 240 V 50 / 60 Hz	AC 100 – 240 V 50 / 60 Hz	AC 100 – 240 V 50 / 60 Hz	AC 100 – 240 V 50 / 60 Hz
Switch	1	1	1	1	1
Wake up	HDMI / LAN	HDMI / LAN	HDMI / LAN	HDMI / LAN	HDMI / LAN
Standby power consumption	<0.5 W	<0.5 W	<0.5 W	<0.5 W	<0.5 W
Typical power consumption	68.3 W	81.9 W	110.3 W	120.8 W	140.7 W
ENERGY STAR®	Yes	Yes	Yes	Yes	Yes
Physical					
Dimensions (W × H × D)	38.1 × 22 × 2.2 in (967.8 × 558.2 × 55.6 mm)	48.7 × 27.9 × 2.2 in (1237.3 × 709.8 × 56.4 mm)	57.3 × 32.8 × 2.2 in (1456.4 × 833.7 × 57 mm)	66.1 × 37.8 × 2.2 in (1679.7 × 959 × 56.8 mm)	75.9 × 43.2 × 2.3 in (1927 × 1098.5 × 59.5 mm)
Bezel width (T B L R)	0.5 0.5 0.5 0.5 in (11.9 12.8 11.9 11.9 mm)	0.5 0.5 0.5 0.5 in (12 12.8 12 12 mm)	0.5 0.5 0.5 0.5 in (12.5 12.5 11.8 11.8 mm)	0.5 0.5 0.5 0.5 in (13 13.5 13 13 mm)	0.5 0.5 0.5 0.5 in (13 13.5 13 13 mm)
Weight (product shipping)	19.2 lbs 127.1 lbs (8.7 kg 12.3 kg)	32.4 lbs 421 lbs (14.7 kg 191 kg)	45.6 lbs 63.3 lbs (20.7 kg 28.7 kg)	63.9 lbs 89.3 lbs (29 kg 40.5 kg)	108.0 lbs 141.1 lbs (49 kg 64 kg)
Mount (screws)	VESA 200 × 200 mm (4 × M6 × 12L)	VESA 400 × 400 mm (4 × M6 × 12L)	VESA 400 × 400 mm (4 × M8 × 16L)	VESA 600 × 400 mm (4 × M8 × 16L)	VESA 600 × 400 mm (4 × M8 × 16L)
VESA mount (for media player)	N/A	1 (75 × 75 mm, 100 × 100 mm)	1 (75 × 75 mm, 100 × 100 mm)	1 (75 × 75 mm, 100 × 100 mm)	1 (75 × 75 mm, 100 × 100 mm)
Housing material	PC+ABS V0	PC+ABS V0	PC+ABS V0	PC+ABS V0	PC+ABS V0 and SGCC
Handles	N/A	N/A	N/A	2	2
Shipping dimensions (W × H × D)	42.3 × 26.9 × 5 in (1075 × 683 × 127 mm)	54.6 × 33.3 × 5.1 in (1386 × 845 × 130 mm)	65 × 6.4 × 40 in (1650 × 162 × 1016 mm)	74.1 × 7.3 × 44.9 in (1883 × 186 × 1140 mm)	83.6 × 8.9 × 49.1 in (2123 × 225 × 1247 mm)
Environment					
Storage temperature	14°F – 140°F –10°C – 60°C	14°F – 140°F –10°C – 60°C	14°F – 140°F –10°C – 60°C	14°F – 140°F –10°C – 60°C	14°F – 140°F –10°C – 60°C
Operating temperature	32°F – 104°F 0°C – 40°C	32°F – 104°F 0°C – 40°C	32°F – 104°F 0°C – 40°C	32°F – 104°F 0°C – 40°C	32°F – 104°F 0°C – 40°C
Storage humidity	10% – 80% RH non-condensing	10% – 80% RH non-condensing	10% – 80% RH non-condensing	10% – 80% RH non-condensing	10% – 80% RH non-condensing
Operating humidity	10% – 80% RH non-condensing	10% – 80% RH non-condensing	10% – 80% RH non-condensing	10% – 80% RH non-condensing	10% – 80% RH non-condensing
Software					
Device management	DMS	DMS	DMS	DMS	DMS
Content management	X-Sign	X-Sign	X-Sign	X-Sign	X-Sign
Wireless screen sharing	InstaShare 2	InstaShare 2	InstaShare 2	InstaShare 2	InstaShare 2
Account management	AMS	AMS	AMS	AMS	AMS
UI resolution	4K UHD	4K UHD	4K UHD	4K UHD	4K UHD
Accessories					
Quick start guide	In box	In box	In box	In box	In box
Remote control	1	1	1	1	1
User manual	Online	Online	Online	Online	Online
Box	BenQ designed	BenQ designed	BenQ designed	BenQ designed	BenQ designed
Cables	1 × HDMI (4.9 ft 1.5 m), 1 × RS-232 (5.9 ft 1.8 m)	1 × HDMI (4.9 ft 1.5 m), 1 × RS-232 (5.9 ft 1.8 m)	1 × HDMI (4.9 ft 1.5 m), 1 × RS-232 (5.9 ft 1.8 m)	1 × HDMI (4.9 ft 1.5 m), 1 × RS-232 (5.9 ft 1.8 m)	1 × HDMI (4.9 ft 1.5 m), 1 × RS-232 (5.9 ft 1.8 m)
On-screen menu languages	28L (AR, CS, DA, DE, EL, EN, ES-ES, FA, FI, FR, HE, HU, ID, IT, JA, KO, NB, NL, PL, PT-BR, RO, RU, SV, TH, TR, VI, ZH-CN, ZH-TW)	28L (AR, CS, DA, DE, EL, EN, ES-ES, FA, FI, FR, HE, HU, ID, IT, JA, KO, NB, NL, PL, PT-BR, RO, RU, SV, TH, TR, VI, ZH-CN, ZH-TW)	28L (AR, CS, DA, DE, EL, EN, ES-ES, FA, FI, FR, HE, HU, ID, IT, JA, KO, NB, NL, PL, PT-BR, RO, RU, SV, TH, TR, VI, ZH-CN, ZH-TW)	28L (AR, CS, DA, DE, EL, EN, ES-ES, FA, FI, FR, HE, HU, ID, IT, JA, KO, NB, NL, PL, PT-BR, RO, RU, SV, TH, TR, VI, ZH-CN, ZH-TW)	28L (AR, CS, DA, DE, EL, EN, ES-ES, FA, FI, FR, HE, HU, ID, IT, JA, KO, NB, NL, PL, PT-BR, RO, RU, SV, TH, TR, VI, ZH-CN, ZH-TW)
OSD					
On-screen menu	BenQ customized	BenQ customized	BenQ customized	BenQ customized	BenQ customized
Feature					
Sharpness enhancement	Yes	Yes	Yes	Yes	Yes
CEC control	Yes	Yes	Yes	Yes	Yes
Real-time clock	Yes	Yes	Yes	Yes	Yes
Firmware updates	USB, OTA	USB, OTA	USB, OTA	USB, OTA	USB, OTA
Freeze and blank screen	Yes	Yes	Yes	Yes	Yes
Temperature sensor	1	1	1	1	1
Screen finish	Matte	Matte	Matte	Matte	Matte