


Proyektor Bisnis XGA | BX3003




TKDN + BMP = 41.52%



HDMI untuk
Transmisi Cepat



Basis Vertikal Otomatis
untuk Penyelarasan
gambar yang sempurna



4000 Lumens,
20000:1 Kontras



Ketahanan Lampu di
Atas 15.000 Jam




Hemat Daya,
Hemat Energi



Peningkatan
Keamanan

Konektivitas

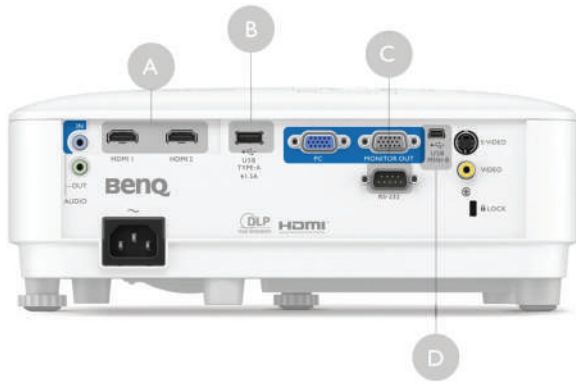

A. HDMI*2

(Definisi tinggi dan transmisi cepat)

B. USB Type-A

(Isi daya smartphonedan tablet Anda kapan saja/
Untuk dukungan dongle opsional)

C. RS-232

(Kirim komando pusat ke proyektor)

D. USB Mini-B USB Mini-B

(Koneksi mudah untuk meningkatkan firmware)

Spesifikasi

Display	
Projection System	DLP Single
DMD type	0.55" XGA
Native Resolution	1024 x 768 pixels
Brightness	4000 ANSI Lumens
Contrast Ratio*	20,000 : 1
Display Color	30 Bits/1.07 Billion Colors
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
Light Source	Lamp
Light Source life*	Normal 6000 hr Economic 10000 hr SmartEco 10000 hr LampSave 15000hr
Optical	
Throw Ratio	1.96~2.15
Zoom Ratio	1.1x
Keystone Correction	Auto ID, Vertical +/- 40 degrees
Projection Offset	110,0%
Projection Size	60"-150"
Audio	
Built-in Speaker	10Wx1
Special Feature	
Security	Security Bar, Kensington lock
Feature	1D Auto Keystone, High Brightness, Spreadsheet mode, Bright Mode, Presentation Mode, Infographic Mode, Video Mode, Srgb Mode
Compatibility	
Resolution Support	VGA(640 x 480) to WUXGA_RB (1920 x 1200)
Horizontal Frequency	15K~102KHz
Vertical Scan Rate	23 ~ 120 Hz
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	"NTSC, PAL, SECAM, SDTV (480i/576i), EDTV (480p/576p, HDTV (720p, 1080i/p 60Hz)"

Power	
Power Consumptions (Max/Normal/Eco)	Max 280W, Normal 260W, Eco 215W
Standby Power consumption	Normal < 0.5Watts.
Power Supply	100 ~ 240V AC
Dimension and Weight	
Product Dimensions (WxHxD)	296 x 120 x 221 mm
Product Weight	2.3kg +/- 200g
Operation Condition	
Noise Level(Normal/Eco)	34 /29 dBA
Operating Temperature*	0 ~ 40oC
Accessories	
Accessories (Standard)	"QSG(4J.JND01.001) Remote Control (5J.JND06.001) AAA Batteryx2 VGA cable (1.5m) Power Cord (1.8m) Warranty card (by Region)"
Accessories (Optional)	"Spare Lamp Kit (5J.JND05.001) 3D Glasses (5J.J9H25.002) Ceiling mount Qcast Mirror(5A.JH328.10X) WDC10 WDC20"
OSD	
On Screen Display Language	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese/ Farsi / Vietnamese/ (30 Languages)

PT. BenQ Teknologi Indonesia

Wisma 77 Tower 2, lantai 15

Jl. Letjen S. Parman No.77, RT.6/RW.3, Slipi, Kota Jakarta Barat 11410

Tlp: 02129675969

www.BenQ.co.id

BenQ