

EDLA BenQ Board

RE04FVD



Octa Core SoC
Excellent performance



Android 13 (Upgradable)
The latest & most secure update



NFC Sensor
Log in with ease



40W Built-in Speaker
20W x 2 speakers



40 Touch Points
Unleash your creativity



5-in-1 Type-C 65W PD
Display, audio, touch, data, and 65W power charging



NFC log in

RE6504FVD TKDN + BMP = **52,23%**

RE8604FVD TKDN + BMP = **50,38%**

RE7504FVD TKDN + BMP = **52,16%**

RE9804FVD TKDN + BMP = **47,99%**



4K Camera Built-in
4K UHD, 13MP, with privacy cover
Auto Focus, Anti-Flicker 50/60Hz



Omnidirectional Microphone
x 8, pickup range 8M. (max)
Echo cancellation, noise suppression

SPEC CERTIFICATE



SIAA Certified for Touchscreen
Antimicrobial property, safety, and appropriate



Germ-Resistant, Eyecare
Safe-to-Touch for touchscreen
Eyecare for Low Blue Light, Flicker Free



IP5X Dust Proof
To ensure consistent operation
IEC standard 60529



Energy Star
Lower energy bills

DISPLAY

Diagonal Size 65", 75", 86", 98"

Display Technology Zero Bonding

Backlight / Panel Type DLED / IPS

Aspect Ratio 16:9

Resolution 3840 x 2160 (4K)

Brightness (typical) 450 cd/m2

Contrast Ratio (typical) 1200:1

Contrast Ratio (dynamic) 30000:1

LCD Viewing Angle 178°/178°

Panel Refresh Rate 60 Hz

Response Time 8 ms

Panel Bit 10-bit

Panel Lifespan 50,000 hours

Operating Hour 18/7

Glass Hardness 9H

Glass Type Heat-tempered 3.2 mm

Germ-Resistant Technology Nano-ionic silver

Panel Surface Anti-Glare

Display Orientation Landscape

TOUCH

Touch Technology	Precision IR
Accuracy	±1.0 mm (middle 90% touch area)
Max. Touch Points	Up to 40
Touch Resolution	32767 x 32767 px
Object Recognition Range	≥ 3.5 mm
Touch Response Time	< 5 ms
Touch Interface	USB-B 2.0 x 2
Compatibility	Windows10/Windows8/Windows7/ macOS/Linux/Android/Chrome OS

COMPUTING

Operating System	Android 13 (Tiramisu) (Upgradable)
CPU	Octa-Core (A73 x 4 + A53 x 4)
GPU	Mali™-G52 MP8
Memory	8GB
Storage	32GB/64GB (up to 512GB)

AUDIOVISUAL

Built-in Speaker	40 Watts (20 W x 2)
Array Microphone	x 8 (max. range 8M) Echo cancellation / Noise suppression
Built-in Camera	4K UHD / 13MP Auto focus / privacy cover Compression format: MJPEG, H.264, H.265, YUV HFOV: Horizontal 116°, Vertical 98.3°, Diagonal 80.8°

CONNECTIVITY

	Front	Rear	Bottom
HDMI In 2.0	x 1	x 2	
HDMI Out 2.0		x 1	
Display port 1.2a		x 1	
VGA In			x 1
PC Audio In			x 1
USB-A 3.0 (High speed data transfer & power supply)	x 2		
USB-A 2.0		x 2	
USB-B 3.0 (Touch)	x 1	x 1	
USB Type-C 3.0 (5-in-1, 65W PD)	x 1		
USB Type-C 2.0 (Data transfer)		x 1	
Mic In (3.5 mm)	x 1		
RS232			x 1
Earphone (3.5 mm)	x 1		
SPDIF (optical)			x 1
Power (AC) Inlet			x 1
OPS Slot		x 1	
Micro SD Card Slot (*with protecting cover)		x 1	
Wake-on-LAN		Yes	
		x 2	
LAN In/Out (RJ45)		OPS: 10/100/1000 Mbps Android: 10/100/1000 Mbps	
Wi-Fi 6.0 (*with protecting cover)		Optional	
Bluetooth 5.2		Optional	

SENSORS

NFC Sensor	Yes
Motion Sensor	NA
Air Ionizer	NA
Indoor Air Quality Sensor	NA
Light Sensor	x 1
IR receiver	x 1

POWER

Power Supply	AC 100 to 240V, 50 to 60 Hz
Power consumption (typical)	65": 66.7W; 75": 73.9W; 86": 106.8W; 98": 122.7W

DISPLAY LANGUAGES

English/French/German/Dutch/Polish/Russian/Czech/Danish/Swedish/Italian/
Romanian/Finnish/Norwegian/Greek/Hungarian/Spanish/Portuguese/Turkish/
Traditional Chinese/Simplified Chinese/Arabic/Japanese/Thai/Persian/Korean/
Vietnamese/ Indonesian/Hebrew (28L)

SOFTWARE/SOLUTIONS

Device Management Solution	DMS 3.0
Account Management Solution	AMS
Broadcasting Solution	X-Sign Broadcast
Wireless Casting Solution	InstaShare 2
Whiteboarding Solution	EZWrite 6
Floating Tool	Yes
Class Recording	Yes
Scalable canvas	Yes
Handwriting recognition	49 Languages
Text to Speech (TTS)	67 Languages
Text Translation	59 Languages
Optical Character Recognition (OCR)	37 Languages
Co-annotation via intranet	Cloud Whiteboard
Co-annotation via internet (Web browser)	EZWrite 6 Web


ACCESSORIES

Remote Control, Power Code (By Region), Stylus x 2, Quick Start Guide, Regulation
Sheet, Touch Cable, HDMI Cable, VGA (15pin) Cable, Type-C Cable, Wall Mount

Model	RE6504FVD	RE7504FVD	RE8604FVD	RE9804FVD
Dimension (WxHxD)	1482.1 × 907.3 × 87.7 mm/	1716.5 × 1041.6 × 87.7 mm/	1962.4 × 1174.9 × 87.1 mm/	2230.8 × 1335.9 × 103.1 mm/
(Without Packing/With Packing)	1640 × 1010 × 185 mm	1860 × 1125 × 185 mm	2095 × 1265 × 185 mm	2455 × 1485 × 310 mm
Net Weight/Gross Weight	36.7 kg/49.7 kg	50.5 kg/65.2 kg	63.7 kg/80.5 kg	104.8kg /134.7kg
VESA Mount/Screws	600 x 400 mm/4-M8 x 25mm	800 x 400 mm/4-M8 x 25mm	800 x 600 mm/4-M8 x 25mm	800 x 600 mm/4-M8 x 20mm

FRONT I/O


NFC READER & FRONT BUTTONS

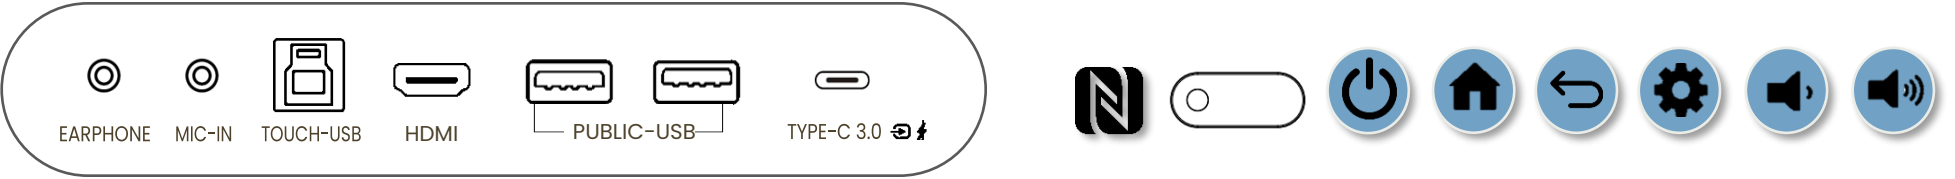

BOTTOM I/O


REAR I/O

Wi-Fi PORT


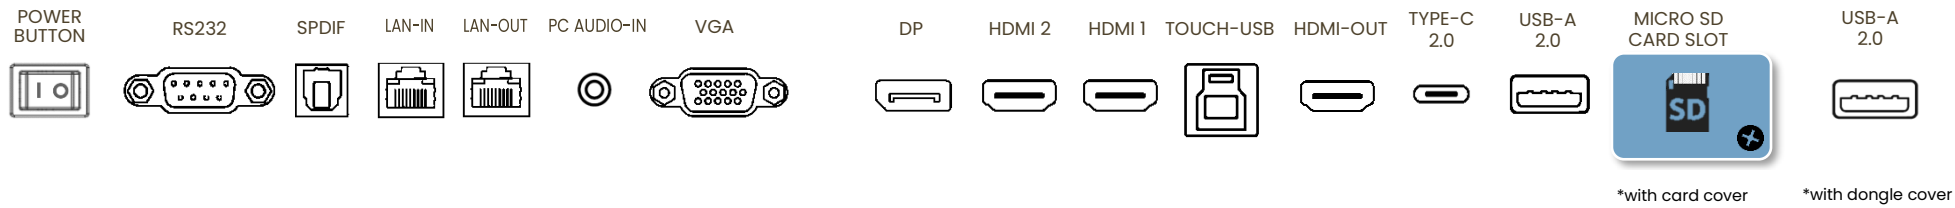


DIMENSION & WALLMOUNT



RE6504FVD

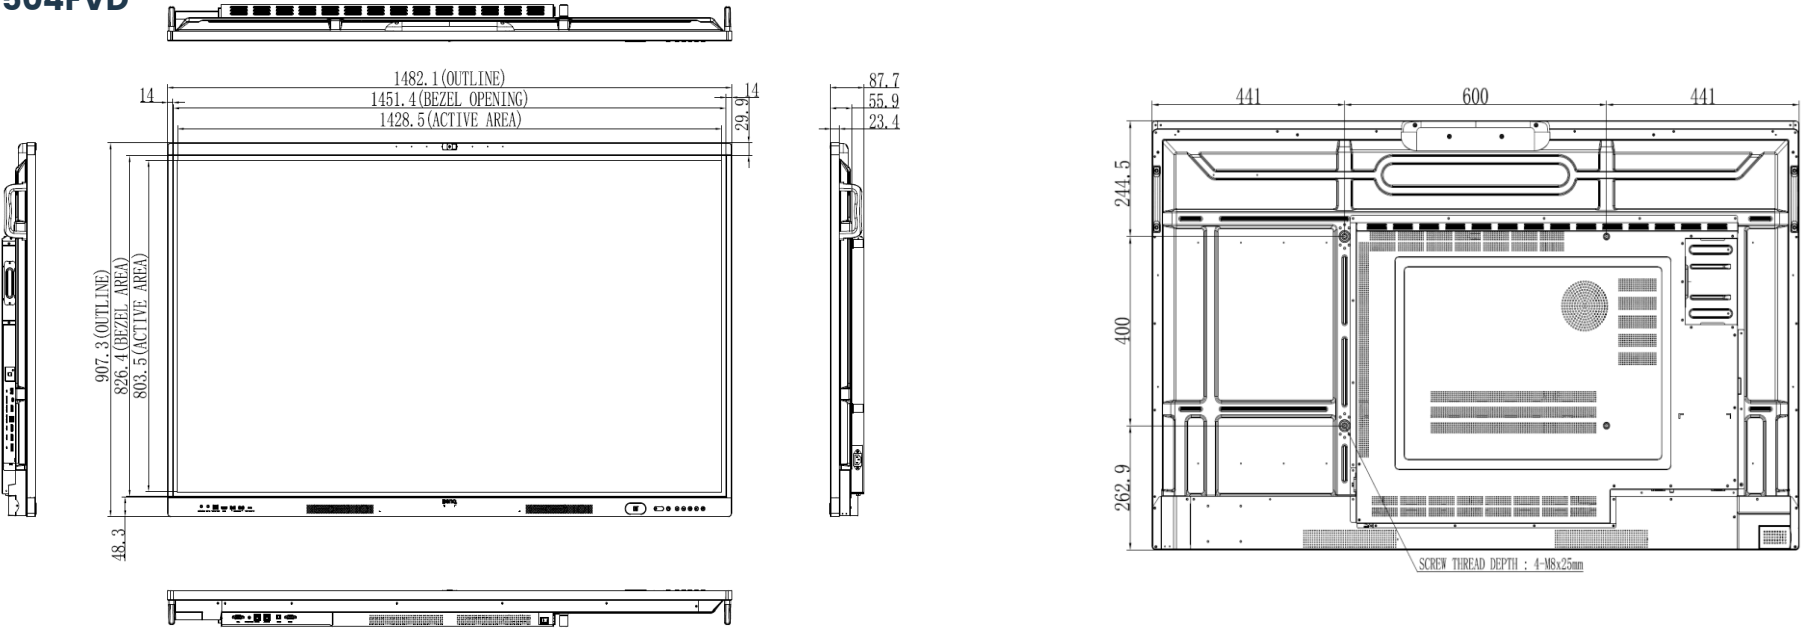

RE7504FVD

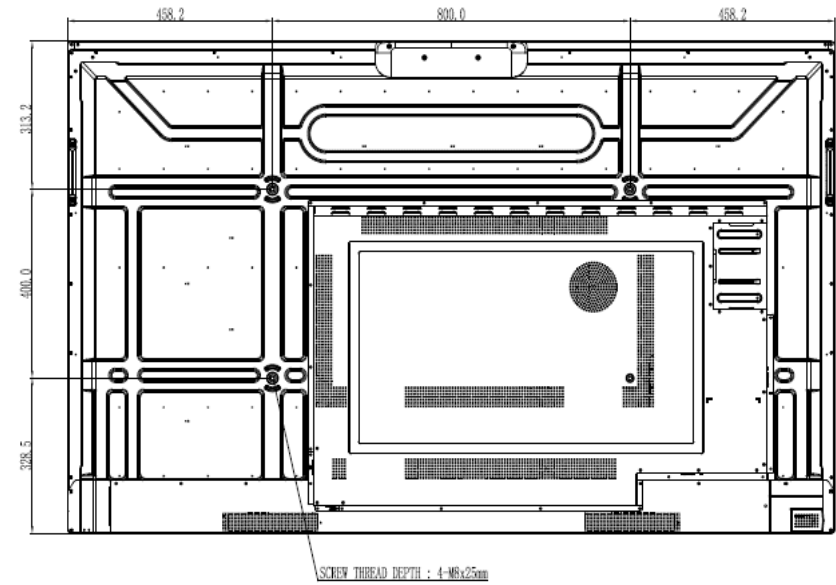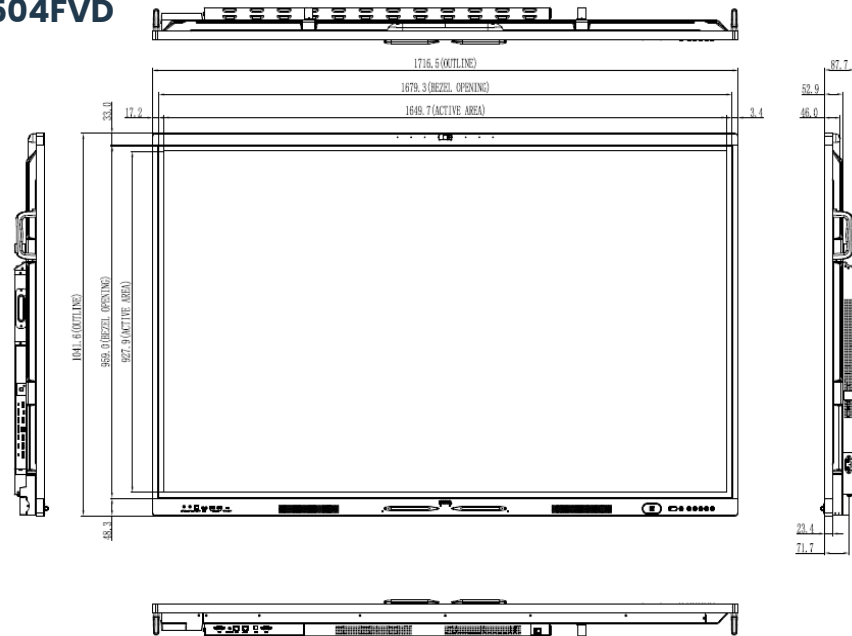

RE8604FVD

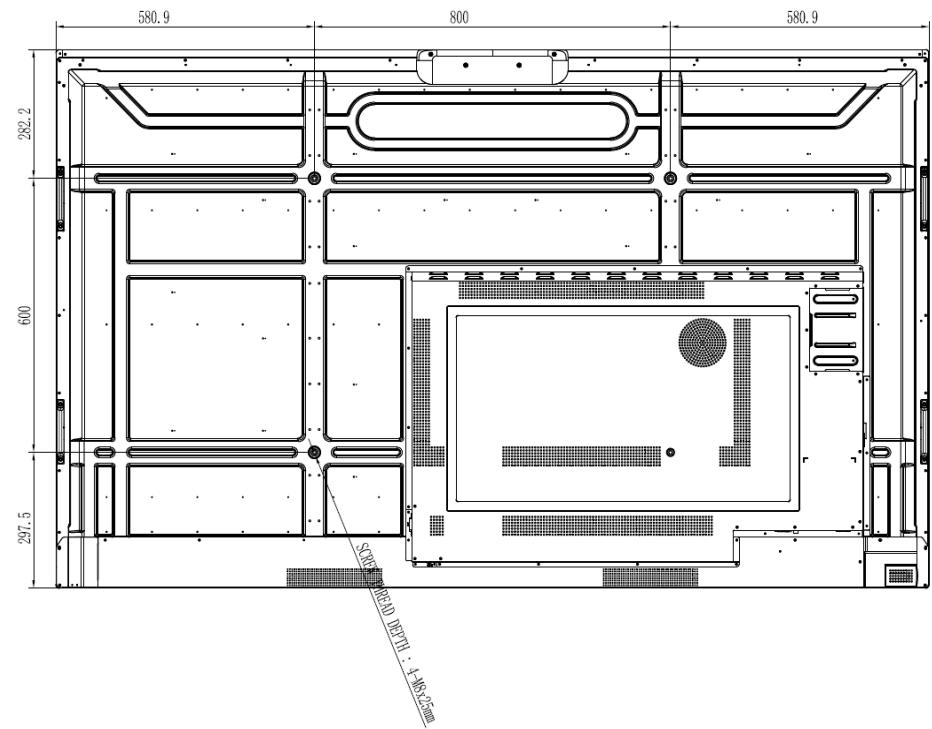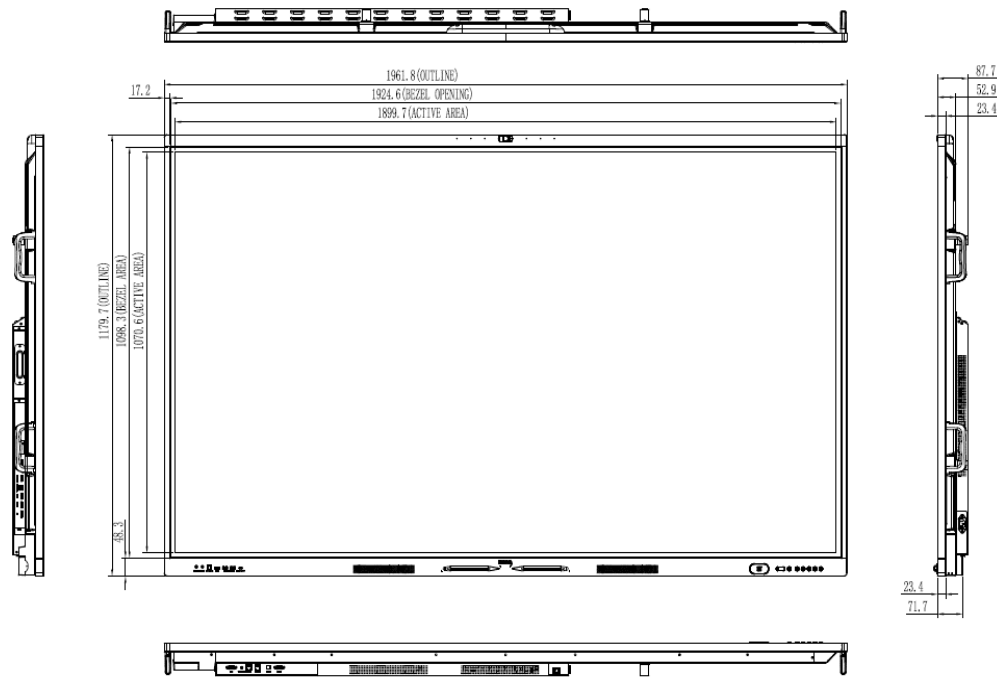

RE9804FVD

