



BenQ DLP Projector

EH700

Feature High Light

- * 4000ANSI Lumens SSI Green Light Source
- * Built in Android 9 OS
- Non Driver Wireless Projection support iOS, ChromeOS, WindowOS, Android
- * Remote scheduling power on & off
- * Increased USB reader to support keyboard, mouse, USB flash drive at a time
- * 10W speaker to fulfill spacious classroom

Display

Projection System	DLP Single
DMD type	0.65" 1080P
Native Resolution	1920 x 1080 pixels (1080P)
Brightness	4000 ANSI Lumens
Contrast Ratio*	30,000,000 : 1
Display Color	30 Bits/1.07 Billion Colors
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)
Light Source	Laser
Light Source life*	Normal 20,000 hr/ECO 20,000 hr

Optical

Throw Ratio	1.15 ~ 1.5 (100" ±3% @ 2.54m)
Zoom Ratio	1.3X
Keystone Correction	2D: Auto Vertical +/- 40 degrees, Horizontal +/- 40 degrees
Projection Offset	105% ± 3%
Projection Size	60"~150"

Audio

Built-in Speaker	10W*1
------------------	-------

Smart System

CPU	Amlogic S905X3
Storage Type	eMMC 16GB
RAM Type	2GB LPDDR4
OS	Android

Special Feature

Security	Security Bar, Kensington lock
Feature	Built-in Android system, Wireless Projection, LAN(RJ45), DMS Local Compatibility, 3 USB reader port, 2D keystone (1D Auto), 10W speaker

Compatibility

Resolution Support	VGA (640 x 480) to 4K UHD (3840 x 2160)
Horizontal Frequency	15K~135KHz
Vertical Scan Rate	23 ~ 120 Hz
HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p, 2160p

Power

Power Consumptions(Max/Normal/Eco)	Max: 275W @100VAC, 255W @220VAC Normal: 200W @100VAC, 191W @220VAC Eco: 138W @100VAC, 133W @220VAC
Standby Power consumption	Normal < 0.5Watts. Network < 2W.
Power Supply	100 ~ 240V AC

Dimension and Weight

Product Dimensions (WxHxD)	303.5 (W) x 224.7 (L)x 112.4 (H) mm
Product Weight	2.9 Kg +/- 100g

Operation Condition

Noise Level(Normal/Eco)	34 /28 dBA (Typical/ECO)
Operating Temperature*	0 ~ 40°C

Accessories

Accessories (Standard)	Remote Control: RCI024 (5JJSM06.001) Wireless USB Dongle (AM EZC5201BS) AAA Battery x2 Power Cord (1.8m) (by region) QSG (4JJSM01.001) Warranty card (by Region)
Accessories (Optional)	Ceiling mount (5JJAM10.001) Carry Bag: BGQS01 (5JJ3T09.001)

OSD

On Screen Display Language	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/
----------------------------	---

Environment Notice

* The Contrast is measure by Full On Full Off standard.


*LightSource life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



Connectivity

	Qty
1 HDMI-1 (HDMI 2.0 (HDCP 1.4/2.2))	1
2 HDMI-2 (HDMI 2.0 (HDCP 1.4/2.2))	1
3 LAN (RJ45)	1
4 USB-1 TypeA (1.5A power/Reader)	1
5 USB-2 TypeA (0.9A power/Reader)	1
6 USB-3 TypeA (0.9A power/Reader)	1
7 USB-4 TypeA (0.9A Wifi dongle; hidden)	1
8 USB-5 TypeA (0.9A Service)	1
9 RS232 In (D-sub 9pin, male)	1
10 Audio out (mini jack)	1
11 Type C (C Input DP(Display) ALT Mode and DC 5V/1A Out)	1
12 Speaker 10W	1
13 IR Receiver (Front+Top)	2
14 Kensington anti-theft lock slot	1
15 Security Bar	1

Installation


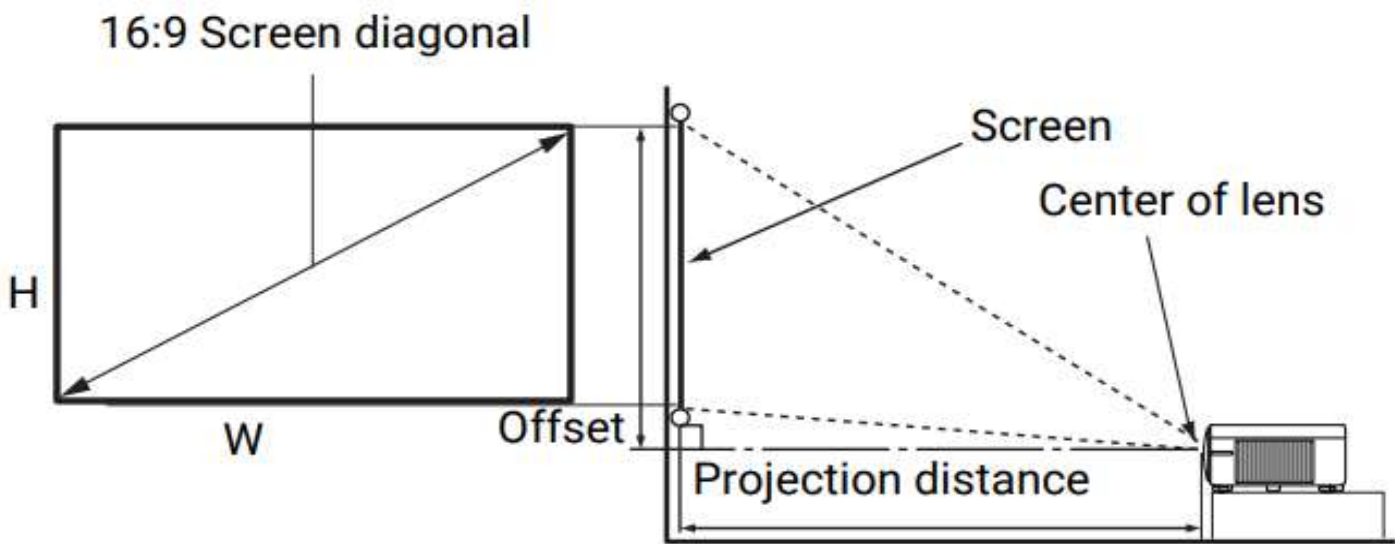


- ! To optimize your projection quality, we suggest doing the projection by referring to the values listed in the non-gray rows.
- ! The values in the gray cells are for reference only.
- 🔧 All measurements are approximate and may vary from the actual sizes. BenQ recommends that if you intend to permanently install the projector, you should physically test the projection size and distance using the actual projector in situ before you permanently install it, so as to make allowance for this projector's optical characteristics. This will help you determine the exact mounting position so that it best suits your installation location.

Screen size				Projection distance (mm)			Offset (mm)
Diagonal		H (mm)	W (mm)	Min distance (with max zoom)	Average	Max distance (with min zoom)	
Inch	mm						
30	762	374	664	764	880	996	21
40	1016	498	886	1018	1173	1328	27
50	1270	623	1107	1273	1467	1660	34
60	1524	747	1328	1528	1760	1992	41
70	1778	872	1550	1782	2053	2324	48
80	2032	996	1771	2037	2347	2657	55
90	2286	1121	1992	2291	2640	2989	62
100	2540	1245	2214	2546	2933	3321	68
110	2794	1370	2435	2800	3227	3653	75
115	2921	1432	2546	2928	3373	3819	79
120	3048	1494	2657	3055	3520	3985	82
130	3302	1619	2878	3310	3813	4317	89
140	3556	1743	3099	3564	4107	4649	96
150	3810	1868	3321	3819	4400	4981	103
160	4064	1992	3542	4073	4693	5313	110
170	4318	2117	3763	4328	4987	5645	116
180	4572	2241	3985	4583	5280	5977	123
190	4826	2366	4206	4837	5573	6309	130
200	5080	2491	4428	5092	5867	6641	137
210	5334	2615	4649	5346	6160	6973	144
220	5588	2740	4870	5601	6453	7306	151
230	5842	2864	5092	5856	6747	7638	158
240	6096	2989	5313	6110	7040	7970	164
250	6350	3113	5535	6365	7333	8302	171
260	6604	3238	5756	6619	7627	8634	178
270	6858	3362	5977	6874	7920	8966	185
280	7112	3487	6199	7128	8213	9298	192
290	7366	3611	6420	7383	8507	9630	199
300	7620	3736	6641	7638	8800	9962	205

Dimension

303.5 (W) x 224.7 (H) x 112.4 mm(D)

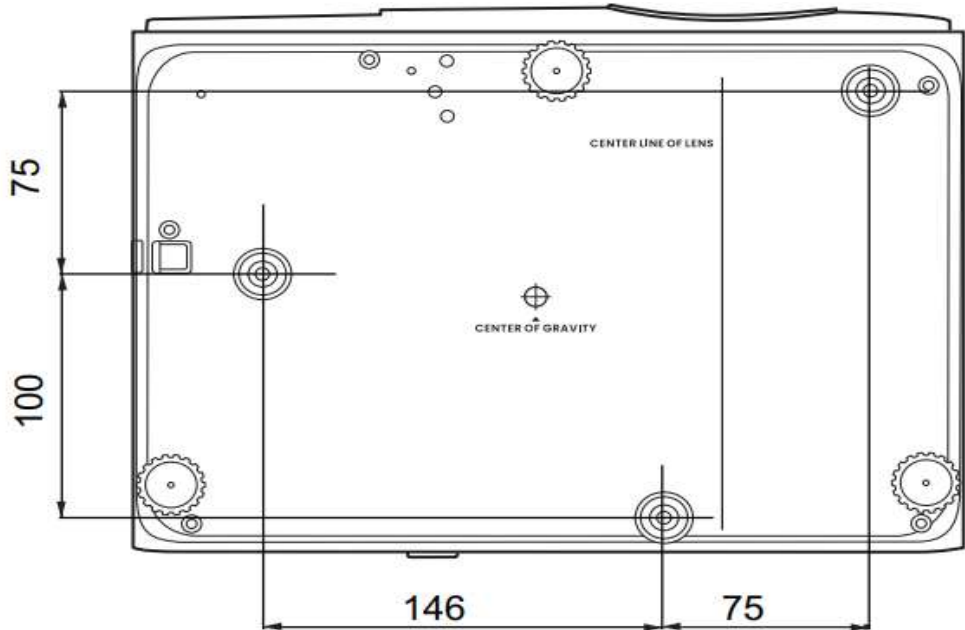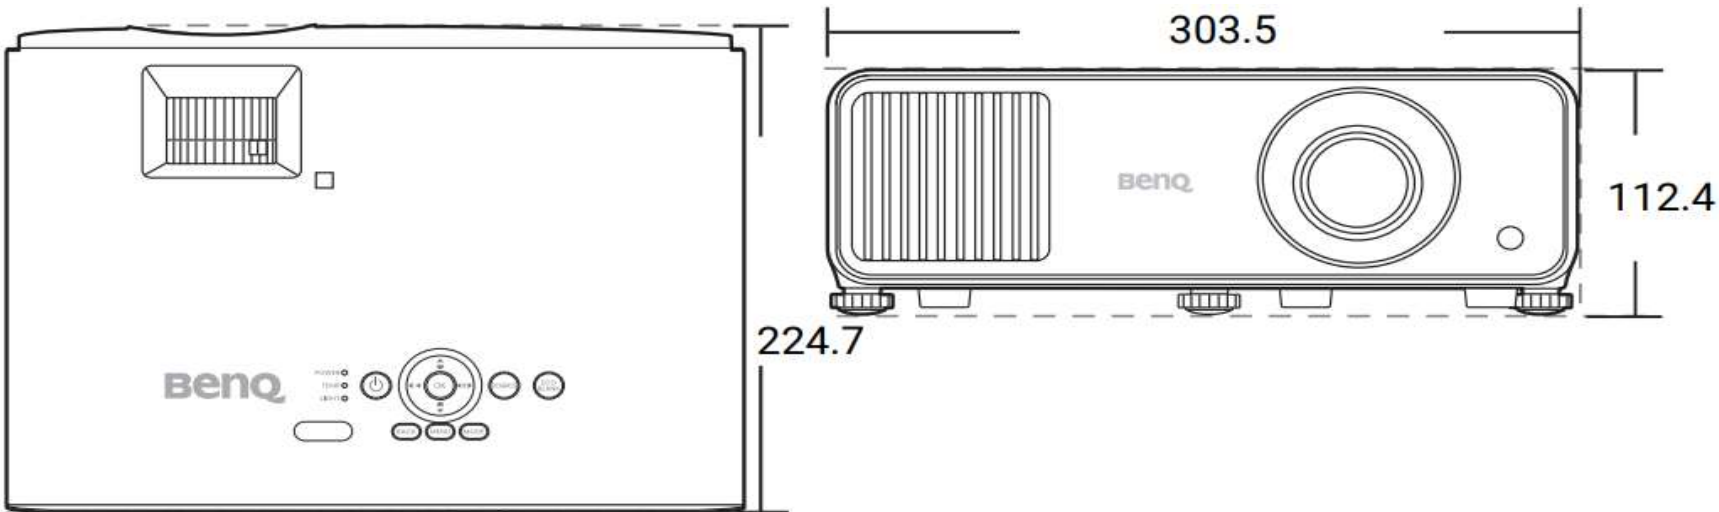

Unit: mm

