



Instruction

UPDD Driver Update for MAC

For BenQ:

RExx01

RExx03N

RMxx03

RMxx03A

RMxx03T

RPxx03

RExx03


ILxx01

Applicable for All Regions

Download UPDD driver from eSupport first.


Installation step:

1. Install UPDD_07_00_XX.

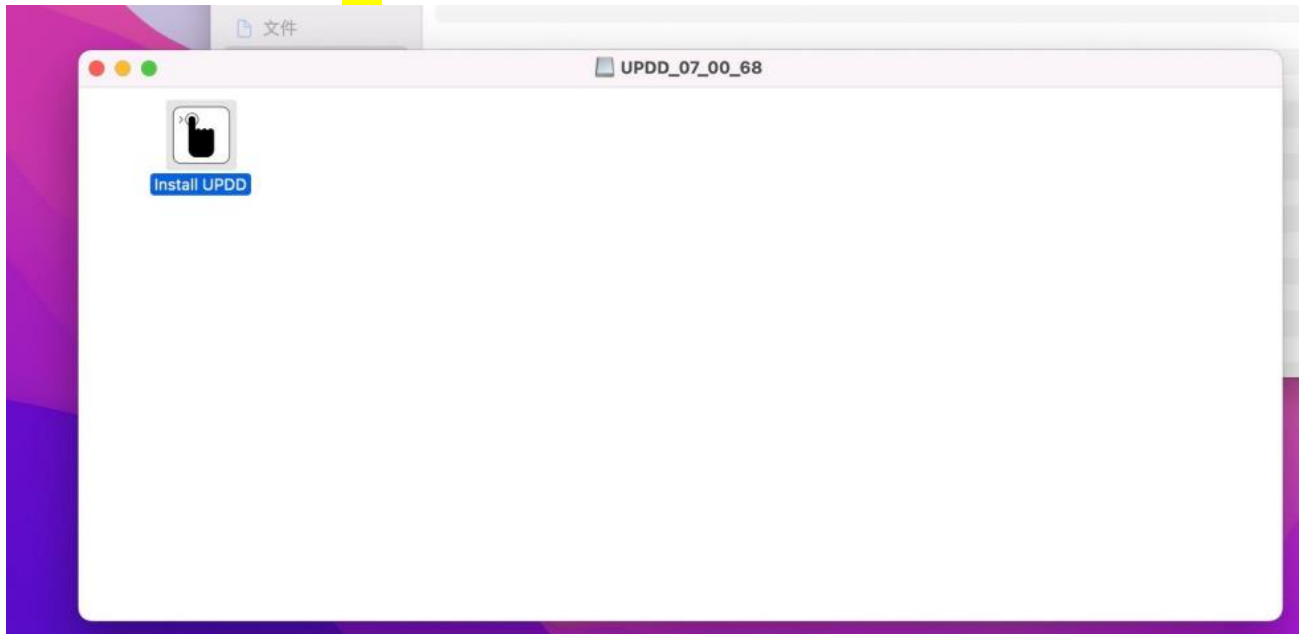



2. System Preferences=> Security & Privacy => Click Allow "UPDD System Extension" (the UI may be different for different macOS version)

macOS 10-13 - 12.x

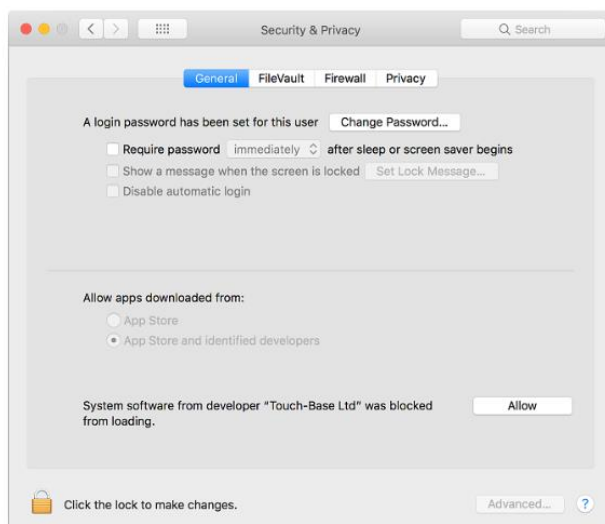

macOS 13 and above

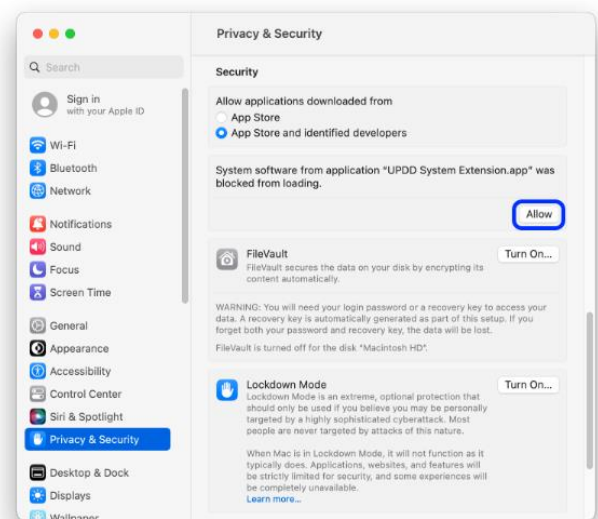

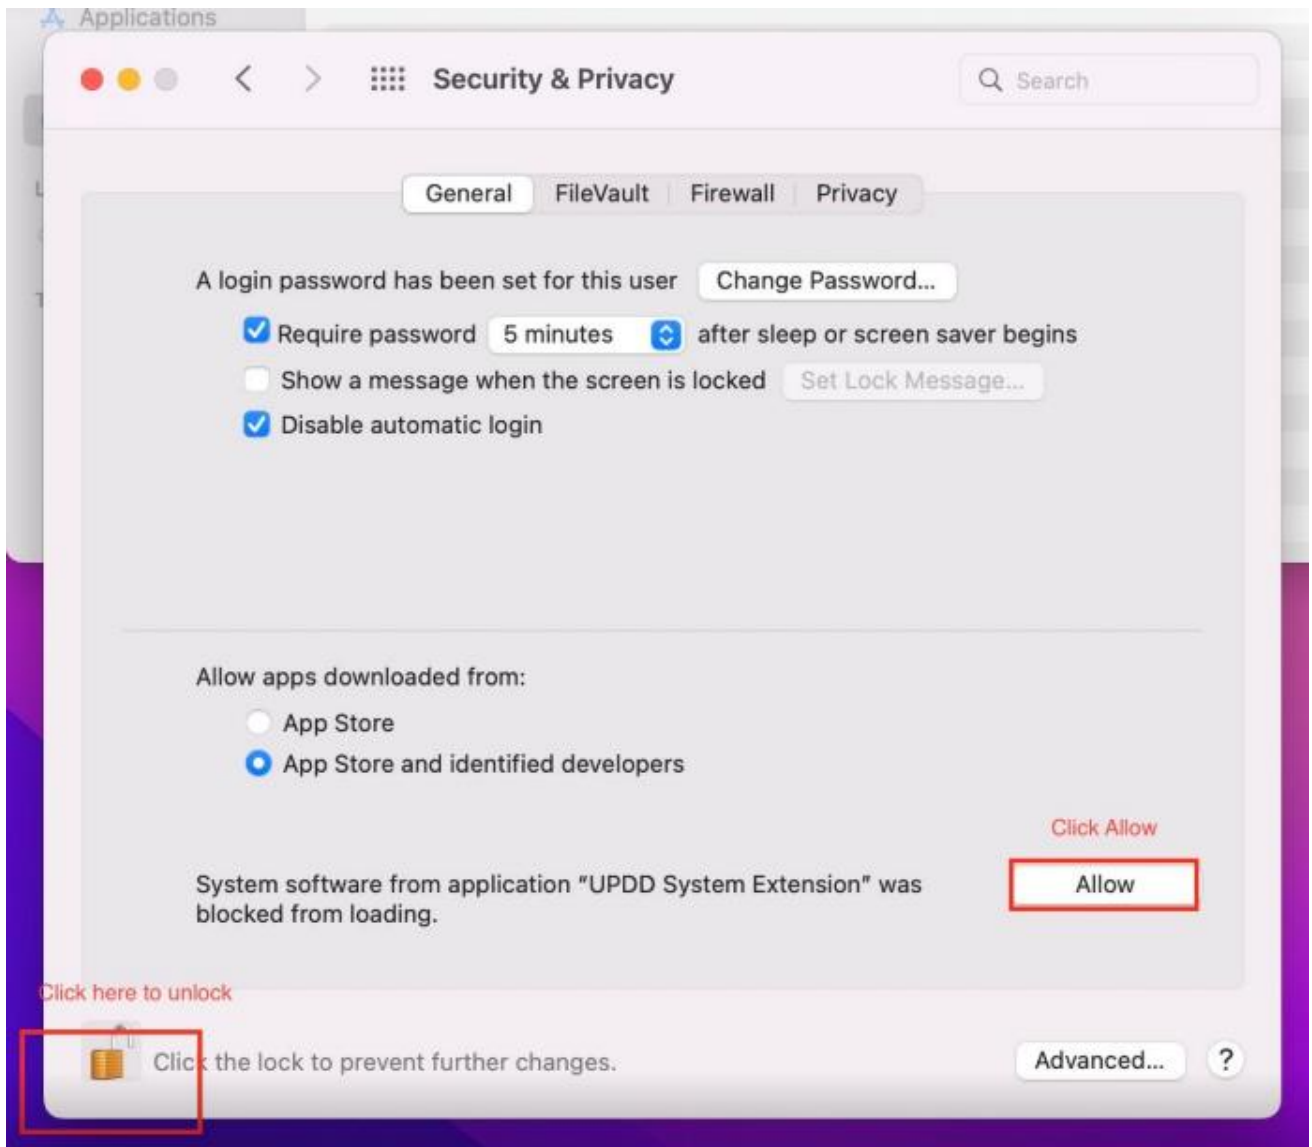


3. System Preferences=> Security & Privacy => Privacy=> Accessibility=> tick "updd" "UPDD Commander" "UPDD Daemon" (the UI may be different for different macOS version)

macOS 10.9 - 12.x



13.x

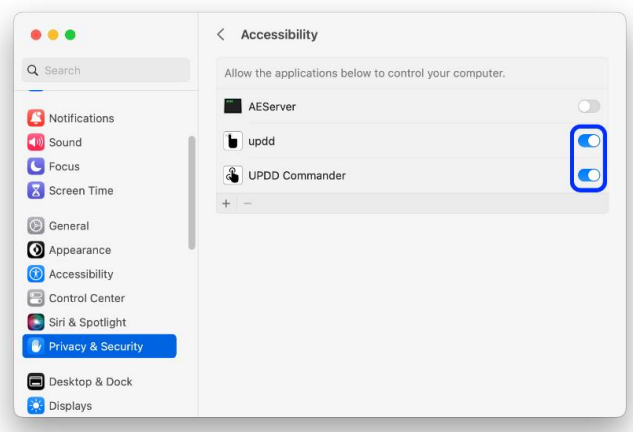

4. Restart your device
5. Connect your type-C cable to the IFP, the below two icons should be as below to indicate updd mac driver is working correctly. If the icons are shown with **!** (exclamation mark) you might need to repeat the installation process again to fix it.

